




MODEL: 1413/6E

CAT6 4 PAIR FTP 23AWG OUTDOOR USE

Product Description

- Bare solid copper conductor
- Colour-coded PE insulation
- Separator: PE
- Shield: PET/AL
- Drain wire: 0.5 BC
- Rip cord
- Lead free PE jacket
- Reference standard: UL1581, UL444, ANSI/TIA-568-C.2

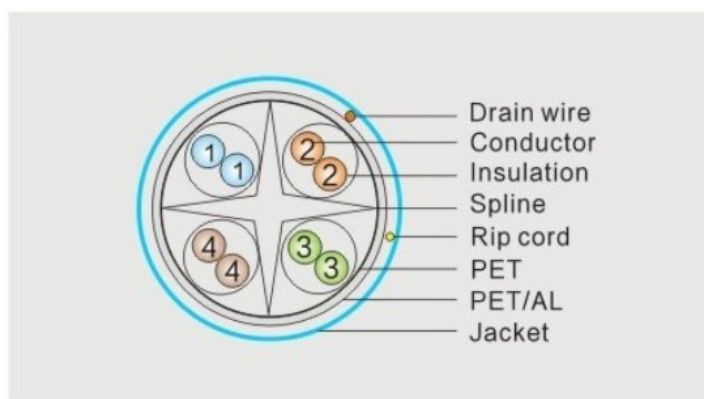

Electrical Characteristics

Frequency MHz	Impedance ohm	RL ≥dB	Attenuation ≤dB/100m	NEXT ≥dB/100m	ELFEXT ≥dB/100m	PS NEXT ≥dB/100m	PS ELFEXT ≥dB/100m	Delay Skew n/s 100m	Propagation Speed
1	100 ± 15	20	2.03	74.3	68	72.3	65	≤45	2400Mbps
4	100 ± 15	23.01	3.78	65.27	55.96	63.27	52.96	≤45	2400Mbps
8	100 ± 15	24.52	5.32	60.75	49.94	58.75	46.94	≤45	2400Mbps
10	100 ± 15	25	5.95	59.3	48	57.3	45	≤45	2400Mbps
16	100 ± 15	25	7.55	56.24	43.92	54.24	40.92	≤45	2400Mbps
20	100 ± 15	25	8.47	54.78	41.98	52.78	38.98	≤45	2400Mbps
25	100 ± 15	24.32	9.51	53.33	40.04	51.33	37.04	≤45	2400Mbps
31.25	100 ± 15	23.64	10.67	51.88	38.1	49.88	35.1	≤45	2400Mbps
50	100 ± 15	22.21	13.66	48.82	34.02	46.82	31.02	≤45	2400Mbps
62.5	100 ± 15	21.54	15.38	47.36	32.08	45.36	29.08	≤45	2400Mbps
100	100 ± 15	20.11	19.8	44.3	28	42.3	25	≤45	2400Mbps
125	100 ± 15	19.43	22.36	42.85	26.06	40.85	23.06	≤45	2400Mbps
200	100 ± 15	18	28.98	39.78	21.98	37.78	18.98	≤45	2400Mbps
250	100 ± 15	17.32	32.85	38.33	20.04	36.33	17.04	≤45	2400Mbps